



MACHINE OVERVIEW



Turbo-Line

S-series



Model	Capacity (L)	Bowl Diameter (mm)	Measure LxWxH (mm)	Engine (kW)	Speed (RPM)	PU Coating (mm)	Weight (kg)
Turbo-Line 60 S	60/30	475	1,390 x 700 x 1,240	1.5	0-180	22	400
Turbo-Line 100 S	100/45	550	1,100 x 740 x 1,200	2.2	0-170	25	500
Turbo-Line 140 S	140/65	660	1,700 x 1,300 x 1,140	4.0	0-160	26	700
Turbo-Line 250 S	245/125	820	1,450 x 1,700 x 1,200	7.5	0-140	30	1.400

Turbo-Line

B-series



Model	Capacity (L)	Bowl Diameter (mm)	Measures: L x W x H (mm.)	Engine (kW)	Speed (RPM)	PU Coating (mm)	Weight (kg)
Turbo-Line 60 B	60/30	475	1,390 x 700 x 1,240	1.5	0-180	22	400
Turbo-Line 100 B	100/45	550	1,100 x 7,40 x 1,200	2.2	0-170	25	500
Turbo-Line 140 B	140/65	660	1,700 x 1300 x 1,400	4.0	0-160	26	700
Turbo-Line 250 B	245/125	820	1,450 x 1,700 x 2,000	7.5	0-140	30	1,400

Manuel Turbo

Deburring machines



Turbo-Line 50A





Turbo-Line 120

Model	Capacity (L)	Bowl Diameter (mm)	Measure LxWxH (mm)	Engine (kW)	Speed (RPM)	PU Coating (mm)	Weight (kg)
Turbo-Line 50A	50	460	1,390 x 700 x 1,240	1.5	50-180	22	400
Turbo-Line 50	50	460	1,000 x 660 x 1,120	1.5	50-180	22	300
Turbo-Line 120	120	640	1,740 x 900 x 1,470	4.0	50-160	26	600
Turbo-Line 230	230	800	1,620 x 1,008 x 1,135	7.5	0-140	30	1,100

Semi-automatic Turbo

deburring with discharge



Turbo-Line 120B



Turbo-Line 80BU

Model	Capacity (L)	Bowl Diameter (mm)	Measure LxWxH (mm)	Engine (kW)	Speed (RPM)	PU Coating (mm)	Weight (kg)
Turbo-line 50B	50/25	460	1,390 x 700 x 1,240	1.5	0-180	22	400
Turbo-Line 80B	80/40	540	1,100 x 740 x 1,200	2.2	0-170	25	500
Turbo-Line 120B	120/50	640	1,700 x 1,300 x 1400	4.0	0-160	26	700
Turbo-Line 230B	230/120	800	1,450 x 1,700 x 2,000	7.5	0-140	30	1,400

Semi-automatic Turbo



Turbo-line 120S



Turbo-Line 80 SU


Model	Capacity (L)	Bowl Diameter (mm)	Measure L x W x H (mm)	Engine (kW)	Speed (RPM)	PU Coating (mm)	Weight (kg)
Turbo-Line 50S	50/35	460	1,390 x 700x1600	1.5	0-180	22	400
Turbo-Line 80S	80/50	540	1,100 x 740x1800	2.2	0-170	25	500
Turbo-Line 120S	120/75	640	1,700 x 1,300 x 2,200	4.0	0-160	26	700
Turbo-Line 230S	230/130	800	2,450 x 1,700 x 2,900	7.5	0-140	30	1,400

Automatic Turbo

Deburring machine with discharge



Turbo-Line 120Q

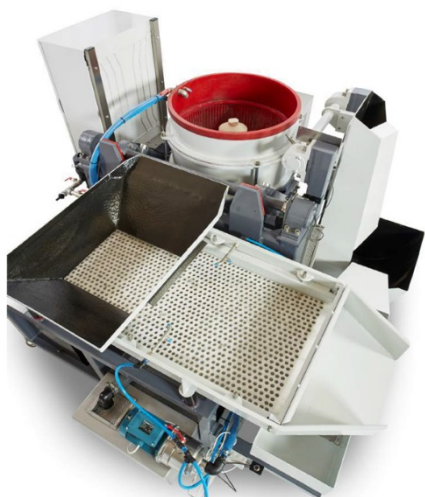



Turbo-Line 230Q In-Line

Model	Capacity (L)	Bowl Diameter (mm)	Measure LxWxH (mm)	Engine (kW)	Speed (RPM)	PU Coating (mm)	Weight (kg)
Turbo-Line 120Q	120	640	2,060 x 1,700 x 1,300	4.0	0-160	26	1,100
Turbo-Line 230Q	230	800	3,200 x 2,700 x 1,800	7.5	0-140	30	1,800
Turbo-Line 240Q	240	800	3,650 x 2,200 x 1,350	4.0x2	0-160	26	1,800
Turbo-Line 460Q	460	800	4,500 x 3,340 x 1,800	7.5x2	0-140	30	3,300

HIGH PRECISION



Turbo-Line 50G



Model	Capacity (L)	Width (mm.)	Depth (mm)	Height (mm.)	Motor (kW / V)	Weight (kg.)	Gap opening (mm.)
Turbo-Line 50G	50	1,02	860	1,6	2.3 / 380	180	0.1 - 2.0

High Precision – Turbo Machines




Turbo-Line 50GS

Model	Capacity (L)	Main measurements (mm.)	Motor (kW)	Speed (RPM)	Weight (kg.)	Gap opening (mm.)
Turbo-Line 50GS	50	1,020 x 860 x 1,600	2.3	400	180	0.1 - 2.0

Round Vibratory

Curved – Semi-automatic round vibratory with discharge A

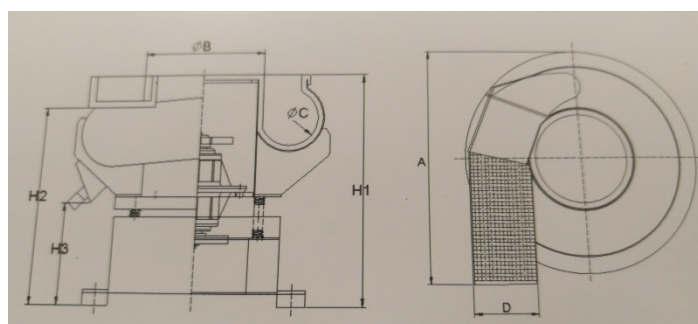

Model	Capacity (L)	diameter (mm)	Engine installation Pipe (mm)	Bowl inside measure (mm)	Discharge-sold (mm)	Hieght (mm)	Discharge height (mm)	Hieght (mm)	Engine (kW)	Weight (kg)
Vibra-Line 100A	100	980	470	220	250	880	760	290	1.5	280
Vibra-Line 200A	200	1,060	530	252	266	940	780	360	3.0	460
Vibra-Line 300A	260	1,286	630	264	287	920	760	260	3.7	600
Vibra-Line 600A	580	1,800	900	390	430	1,200	960	410	5.5	1,500
Vibra-Line 900A	820	2,100	1,060	445	450	1,500	1,220	550	11.0	2,470

Round vibratory

U Shape -semi-automatic round vibratory with discharge




Vibra-Line 300B

Model	Capacity (L)	Diameter (mm)			Discharge - sold i(mm)	height (mm)	Discharge Height (mm.)			Engine (kW)	Weight (kg)
		A	B	C			H1	H2	H3		
Vibra-Line 100B	100	1,080	460	220	250	980	800	470	1.5	280	
Vibra-Line 150B	150	1,170	460	260	210	860	710	440	2.2	320	
Vibra-Line 200B	200	1,200	530	252	250	940	770	360	3.0	460	
Vibra-Line 300B	270	1,370	630	275	320	960	760	290	3.7	650	
Vibra-Line 400B	480	1,430	630	330	380	1,270	1,090	570	5.0	780	
Vibra-Line 600B	660	1,860	900	390	470	1,140	925	400	7.5	1,180	


Round vibratory

with reverse discharging system – Model BC



Spiral Tube Vibrator

Model	Capacity (L)	Height (mm.)	Motor (kW / V)	Installation area (mm.)	Weight (kg.)
Vibra-Line 200BC	200	1,1	3.0	1,205 x 1,070	400
Model	Capacity (L)	Height (mm.)	Motor (kW / V)	Installation area (mm.)	Weight (kg.)
Vibra-Line Spiral tube vibrator 170	170	1,1	5.5	1,450 x 1,450	1,2

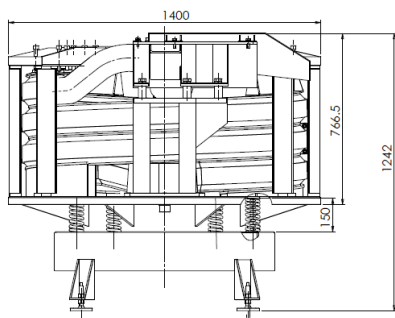


Round vibratory shaped bowl - model A



Model	Capacity (L)	diameter (mm)	Engine installation pipe (mm)	Bowl inside measure (mm)	Discharge - sold (mm)	Height (mm.)	Engine (kW)	Weight (kg.)
Vibra-line A30M	31	640	130	185	225	810	0.5	100
Vibra-Line A80M	78	830	226	224	270	920	0.75	120
Vibra-Line A100M	100	1,020	470	220	330	860	1.5	260
Vibra-Line A200M	200	1,200	540	220	343	900	3.0	400
Vibra-Line A300M	300	1,310	620	280	365	900	3.7	560
Vibra-line A600M	600	1,820	910	380	500	1,350	5.5	1,080
Vibra-line A900M	900	1,930	610	560	490	1,330	9.0	1,850
Vibra-Line A1200M	1,200	2,020	740	560	645	1,420	11.0	2,400

Round vibratory

Shaped bowl -Model B



Model	Capacity (L)	Width (mm)	Engine installation pipe (mm)	Process bowl inside width (mm.)	Depth (mm)	Height (mm)	Engine (kW)	Weight (kg)
Vibra-line 30	30	670	136	184	200	800	0.5	85
Vibra-Line 60	63	830	114	280	245	910	1.1	110
Vibra-Line 100	100	1,020	470	216	330	860	2.2	260
Vibra-Line 200	220	1,200	625	220	385	915	3.0	420
Vibra-Line 300	250	1,310	620	270	390	900	3.7	600
Vibra-Line4 00	400	1,410	633	320	450	1,040	5.0	850
Vibra-Line 600	660	1,820	910	370	490	1,140	7.5	1,100
Vibra-Line 900	920	1,930	610	560	510	1,350	9.0	1,850
Vibra-Line 1200	1,300	1,930	610	560	575	1,350	11.0	2,200
Vibra-Line 1500	1,500	2,120	690	630	630	1,420	15.0	2,400
Vibra-Line 2500	2,500	2,300	850	650	850	1,350	18.5	3,000


Round vibratory

shaped bowl without discharge – Model C



Model	Capacity (L)	Diameter (mm)	Bowl inside measure (mm)	Discharge Height (mm)	Engine (kW)	Weight (kg)
Vibra-Line C450	480	1,430	380	1,060	5.0	720
Vibra-Line C800	800	1,850	480	1,220	5.5	1,080

Vibratory dryer

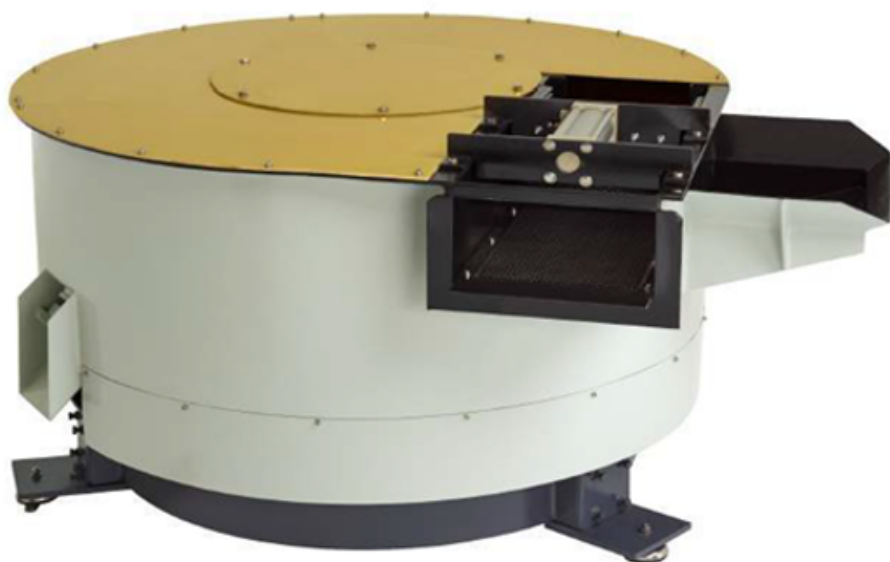


Vibra-Dry 600



Vibra-Dry 200



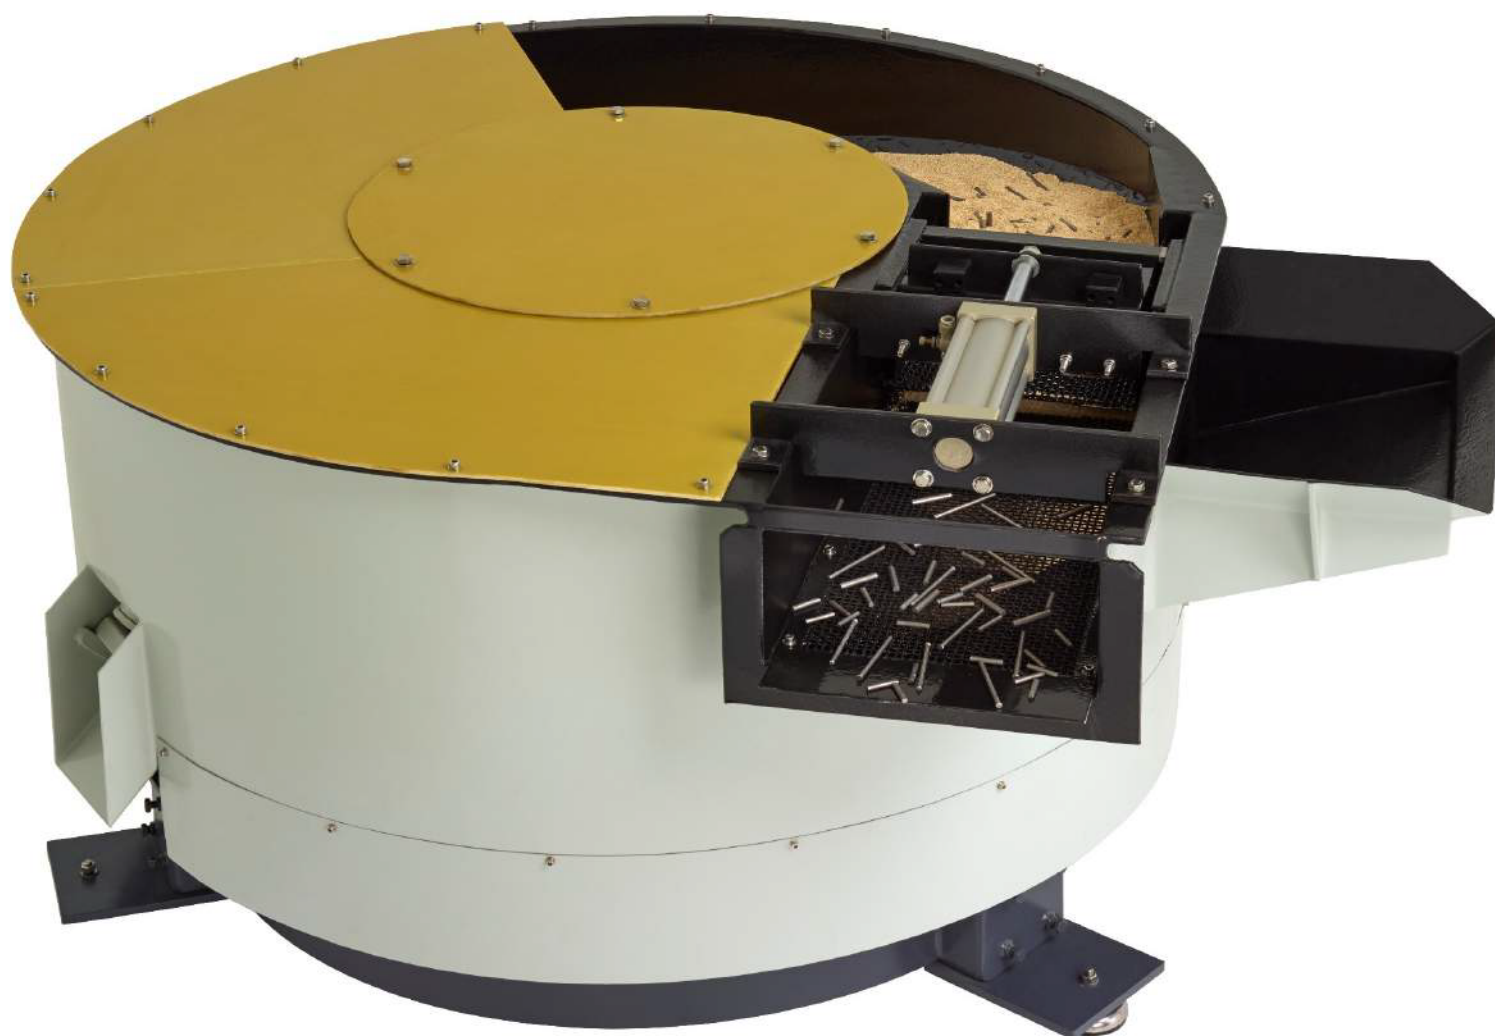


Model	Capacity (L)	Weight (kg)	Engine (kW)	Heater (kW)	Bowl (mm)	Size (ø x H mm)	Inlet Height (Height mm.)	Discharge Height (mm.)
Vibra-Dry 200	200	550	1.5	1.5 kW x 6	320	ø 1,200 x 905	± 770	± 725
Vibra-Dry 600	600	900	1.5	2.2 kW x 6	400	ø 1,560 x 1,030	± 820	± 820

Linear type vibratory machine


U Shaped




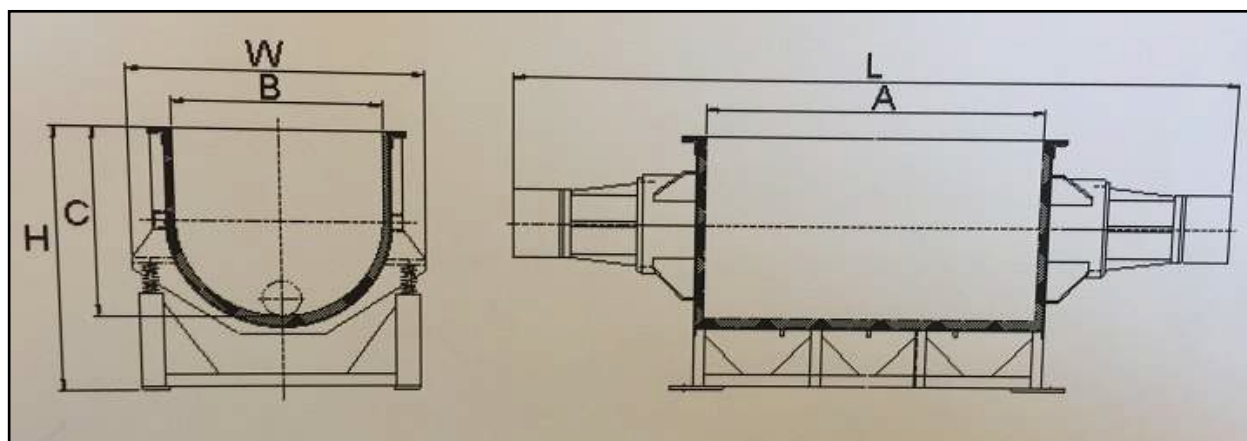


Model	Capacity	Measure (LxBxH)	Camber Length	Camber Height	Camber Diameter	Engine kW	Weight (kg)
Vibra-Trough 15	15	565 x 330 x 670	440	220	200	0,37	60
Vibra-Trough 145	145	760 x 715 x 1,180				1,5	125
Vibra-Trough 250	250						680
Vibra-Trough 500	500	2,670 x 1,000 x 985	1,310	700	690	2.2 x 2	700
Vibra-Trough 750	750	3,212 x 1,407 x 1,201	1,809	675	690	4.0 x 2	1,200
Vibra-Trough 900	900	2,700 x 1,050 x 1,100	1,200	850	900	4.0 x 2	1,500
Vibra-Trough 1,200	1,200	3,000 x 1,050 x 1,100	2,000	850	750	4.0 x 2	2,100
Vibra-Trough 1,800	1,800	3,500 x 1,336 x 1,256	2,000	940	1,120	5.5 x 2	2,800
Vibra-Trough 2,800	2,800	3,300 x 1,830 x 1,740	1,580	1,270	1,500	9.0 x 2	4,000

Magnetic Separator


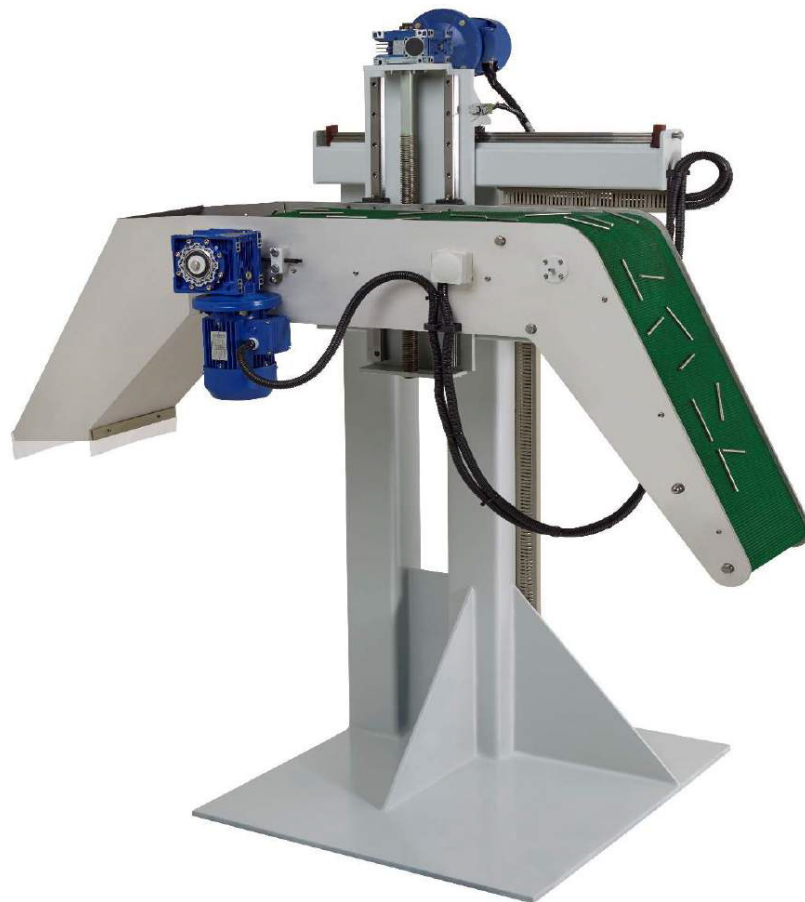




Model L

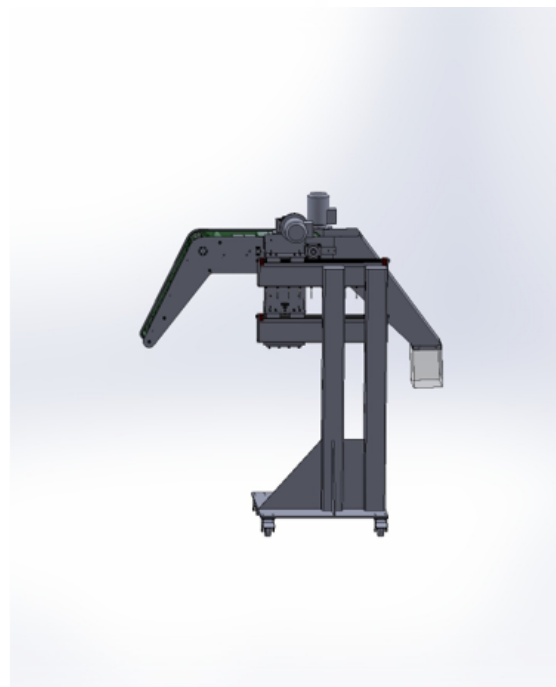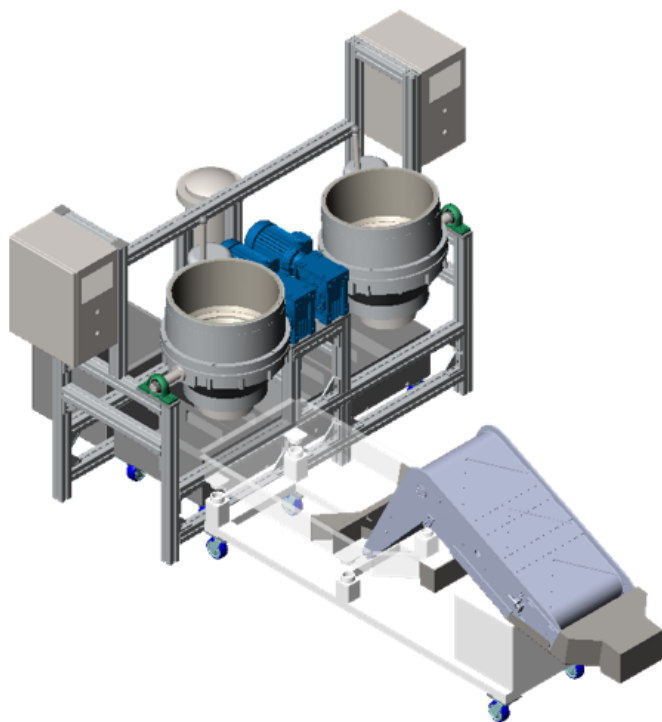



Magnet Separator L-Model

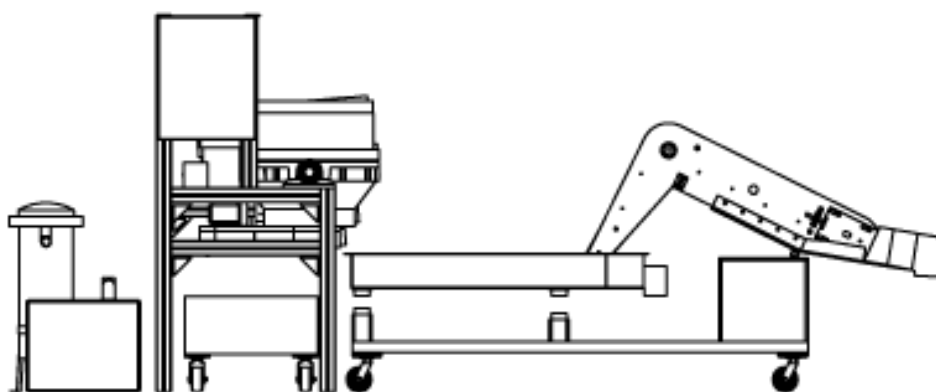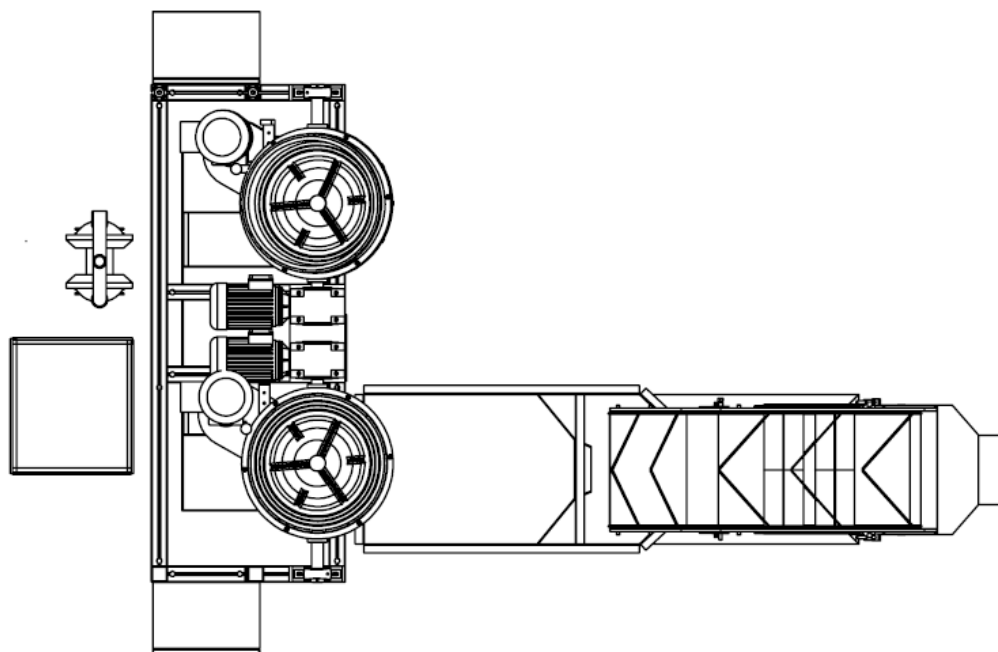


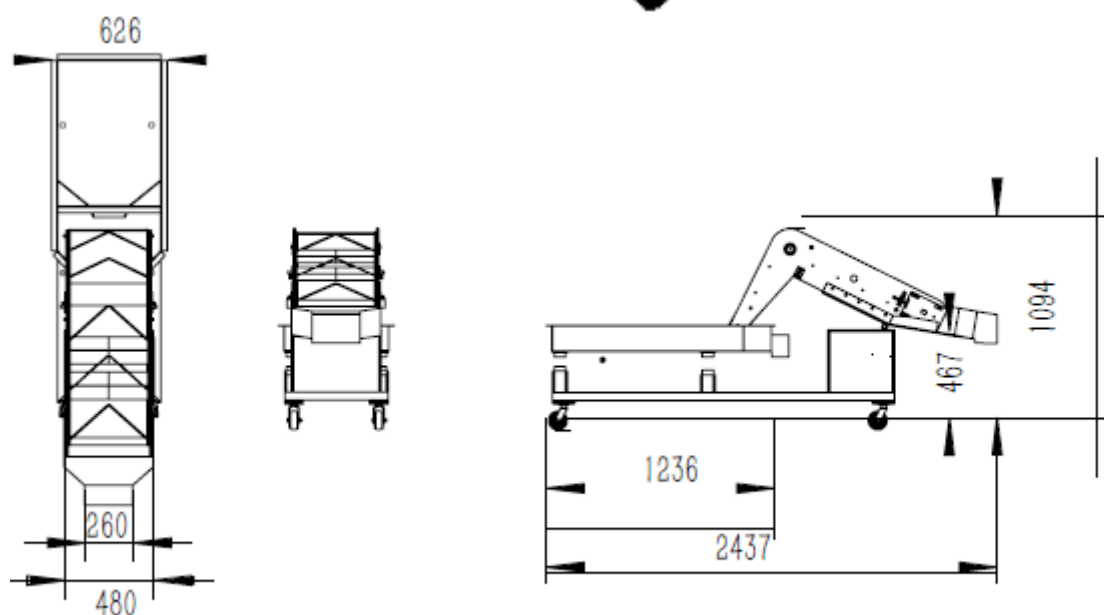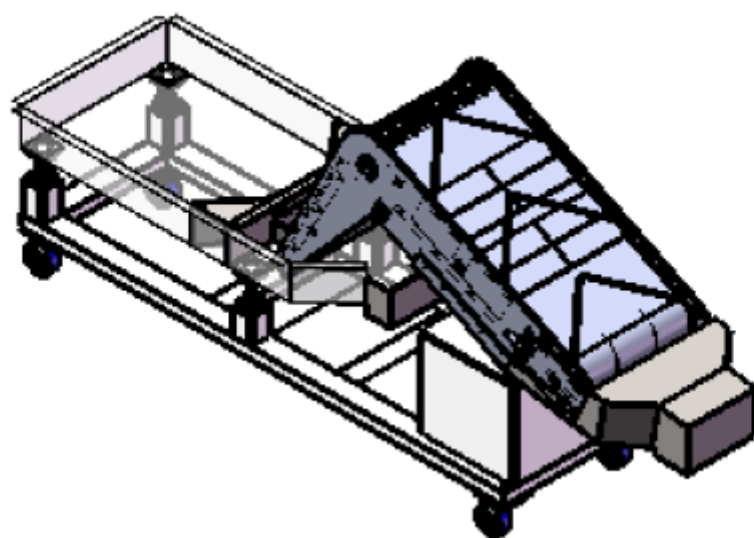


Model	Electric model	Speed	Suction height (mm.)	Main measurements (mm)	Engine	De-magnetics ion Unit	Weight (kg)
-------	----------------	-------	----------------------	------------------------	--------	-----------------------	-------------

L-480	200 x 480	0,5 M/S	480	2.440 x 500 x 1.095	0,55 kW	TC-2AC-220V	410
T-430	130 x 430	0,5 M/S	450	1.200 x 920 x 1.600	0,75 kW	TC-2AC-220V	480


Vibratory table

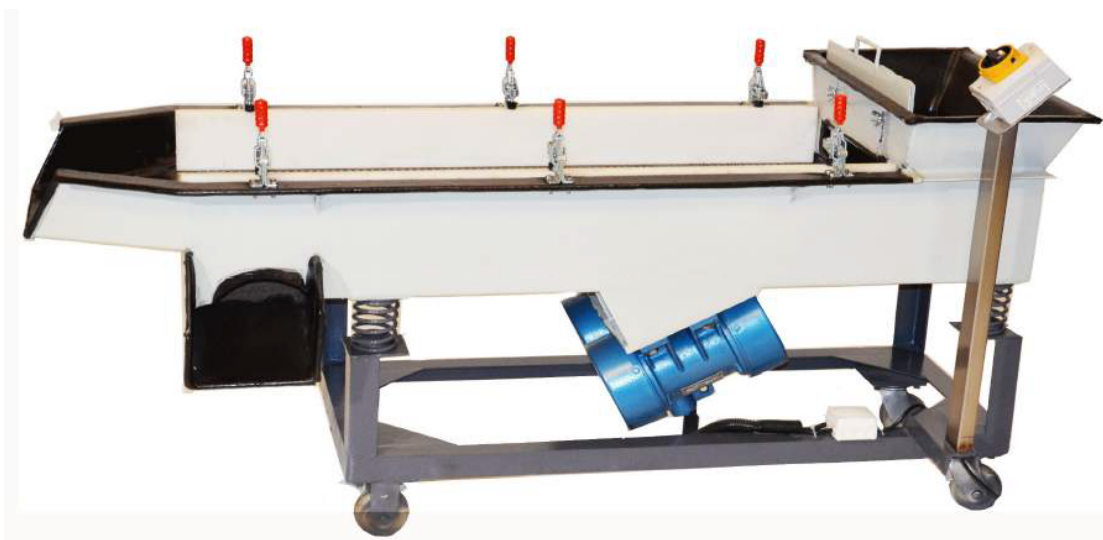


Vibra-Sep 1100

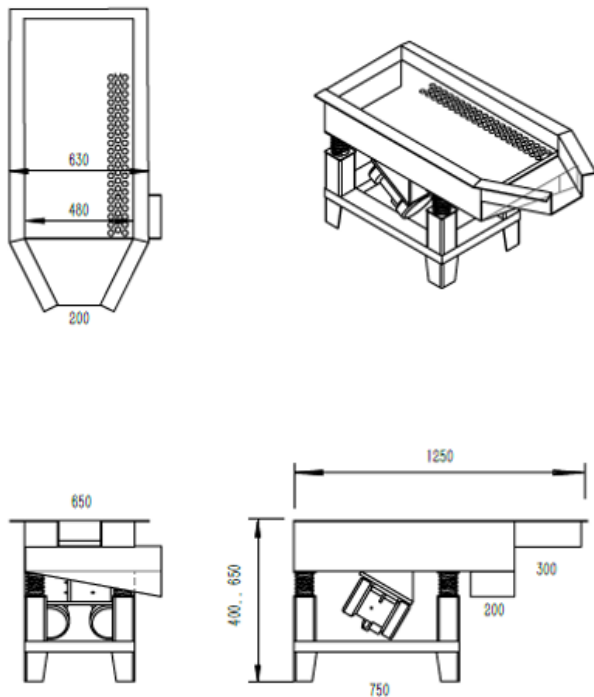


Vibra-Sep 1300

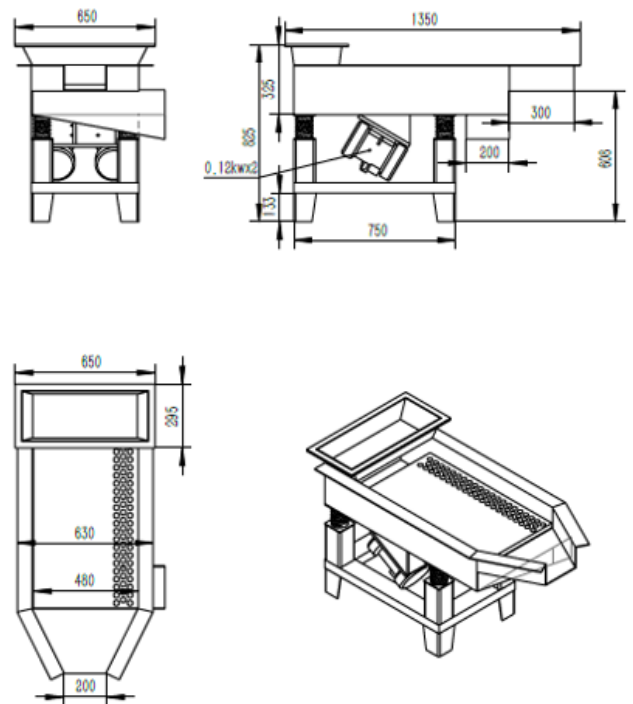

Vibra-Sep 1700

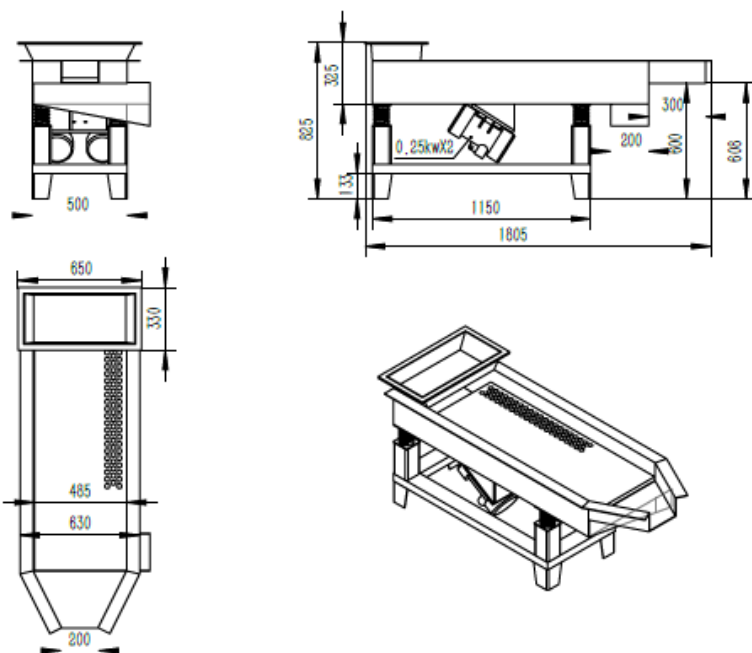


Vibra-Sep 2200

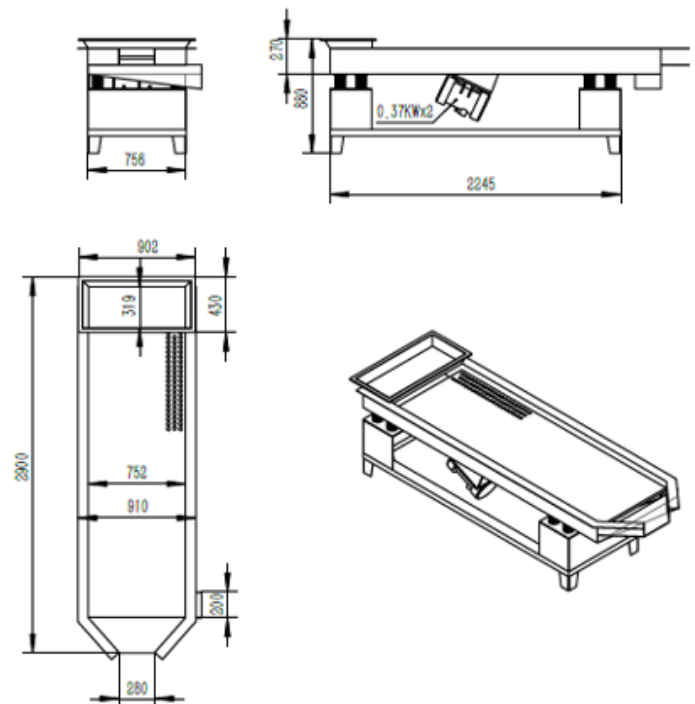

Sewage systems

Filter press

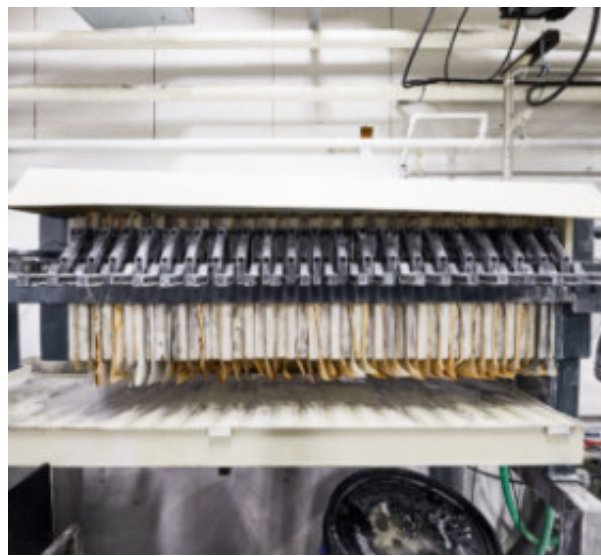

Filter press 30 L.


Filter press 50 L.

Filter press 151 L.

Dosing pumps w/ solenoid & ball valve



Feeding pump

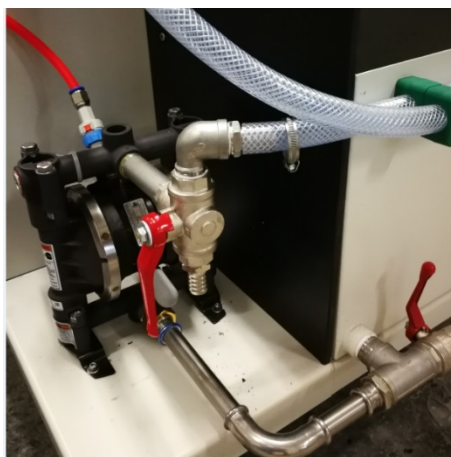

Peristaltic pump



Tank w/feed pump and level sensors



1.100 L.



1.400 L.

Model	Volume	Height incl tripod (mm)	Diameter	Bottom	Total weight (kg)
500 L.	500 mm	2,100 mm	760 mm	Ø 200 mm	22 kg
1,100 L.	1,100 mm	2,100 mm	1,200 mm	Ø 400 mm	37 kg
1,400 L.	1,400 mm	2,600 mm	1,100 mm	Ø 400 mm	50 kg

Buffer tank



90 L. Buffer tank w/pump and filter basket

Model	Measurement LxWxH
90 L.	700 x 400 x 450
240 L.	600 x 500 x 800

You have the items we have the solutions



**Our location
&
Our Test-Centre**

If you have any questions, please contact our customer support department

COO

Hans Wolf

+45 27 83 94 83

hans@pers-group.com

Test Center

Torben Pers

+45 28 19 28 75

torben@pers-group.com

October 2019